


Tripod Turnstile **Z3338**



Technical Data

Power consumption	50W
Housing Size	1300*280*950mm
Housing material	1.5—2mm, 304# stainless steel, corosion resistant
Channel width	550—600mm
Pass speed	25 persons/min.
IP protection	IP44
Input singal optional	DC12V/dry/contact/RS485/RS232/Remote)
railing-off against power off	Yes
Working enviroment temperature	minors 30°C to 70 °C
Working environments	indoor,outdoor
Relative humidity	≤95% coagulation free
MCBF	2,000,000 cycle

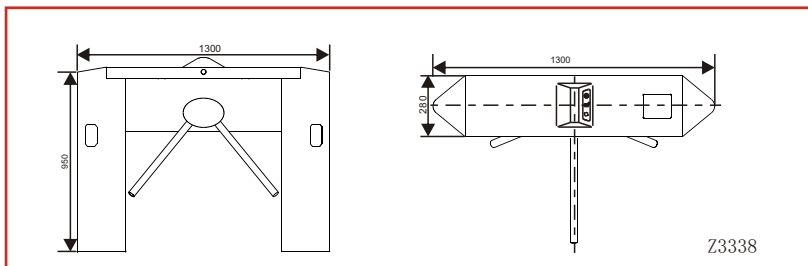

Working Mode

- One way free passing, one way forbidden
- One way free passing, one way controlled
- Two way controlled
- Two way free passing

Functions

- MS steel material housing available
- Installation of card readers
- Input signal optional (DC12V/Dry contact/RS485/RS232/Remote)
- Flow counting device
- Card swiping memory function
- Alarming for illegally pushing bars.
- Self-detecting function
- Bar protection sleeve(optional)



2mm SS304 stainless steel



Equipped with passing indicator light, prompting the passing direction



LED display



Railing off against power off